

Performance PC 130



5" Performance Coaxial Kit




- Polyglass cone
- Aluminum basket
- Adjustable inverted dome tweeter

SPECIFICATIONS

Nominal power	60W	
Maximum power	120W	
Sensitivity	91.6dB	
Cone	Polyglass	
Surround	Butyl	
Nom. impedance	4 Ohms	
DC resistance	3.22 Ohms	
VC diameter	25mm	
VC height	11mm	
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance	0.15mH	
Xmax	3mm	0 ¹ / ₈ in
Magnet d x h	85 x 17mm	3 ¹ / ₃ x 0 ² / ₃ in
Magnet weight	215g	0.47 lb
Flux density	-	
Gap height	5mm	0 ³ / ₁₆ in
Net weight	950g	2.09 lb

FREQUENCY RESPONSE / IMPEDANCE

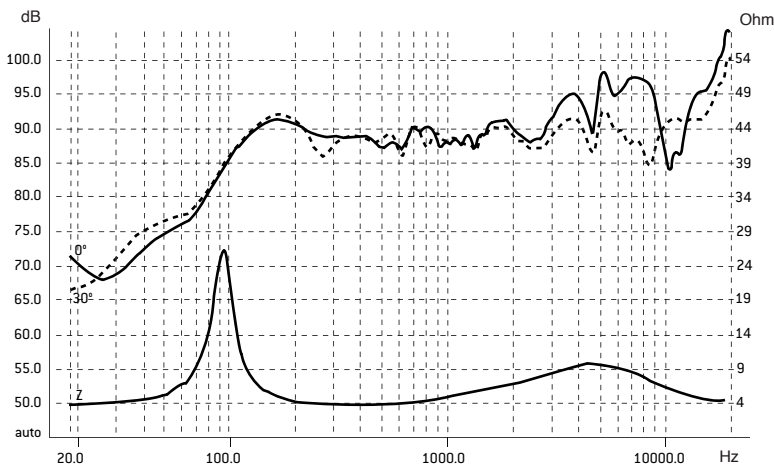

PARAMETERS

Fs	101.14Hz	
Vas	2.96 l	
Qts	0.73	
Qes	0.81	
Qms	7.74	
Re	3.22 Ohms	
Sd	86.59cm ²	
Cas	2.11E-8 m ⁵ /N	
Mas	117.5 kg/m ⁴	
Ras	9647.19 Ohms.ac	
Cms	281µm/N	
Mms	8.81g	
Rms	0.729kg/s	
Ces	395.85mH	
Les	6.26mH	
Res	30.77 Ohms	
Bl	4.72N/A	
SPL	87.60dB/W/m	

MECHANICAL DRAWING

Unit: mm

