


UNIVERSAL ISS 570

2 way component kit

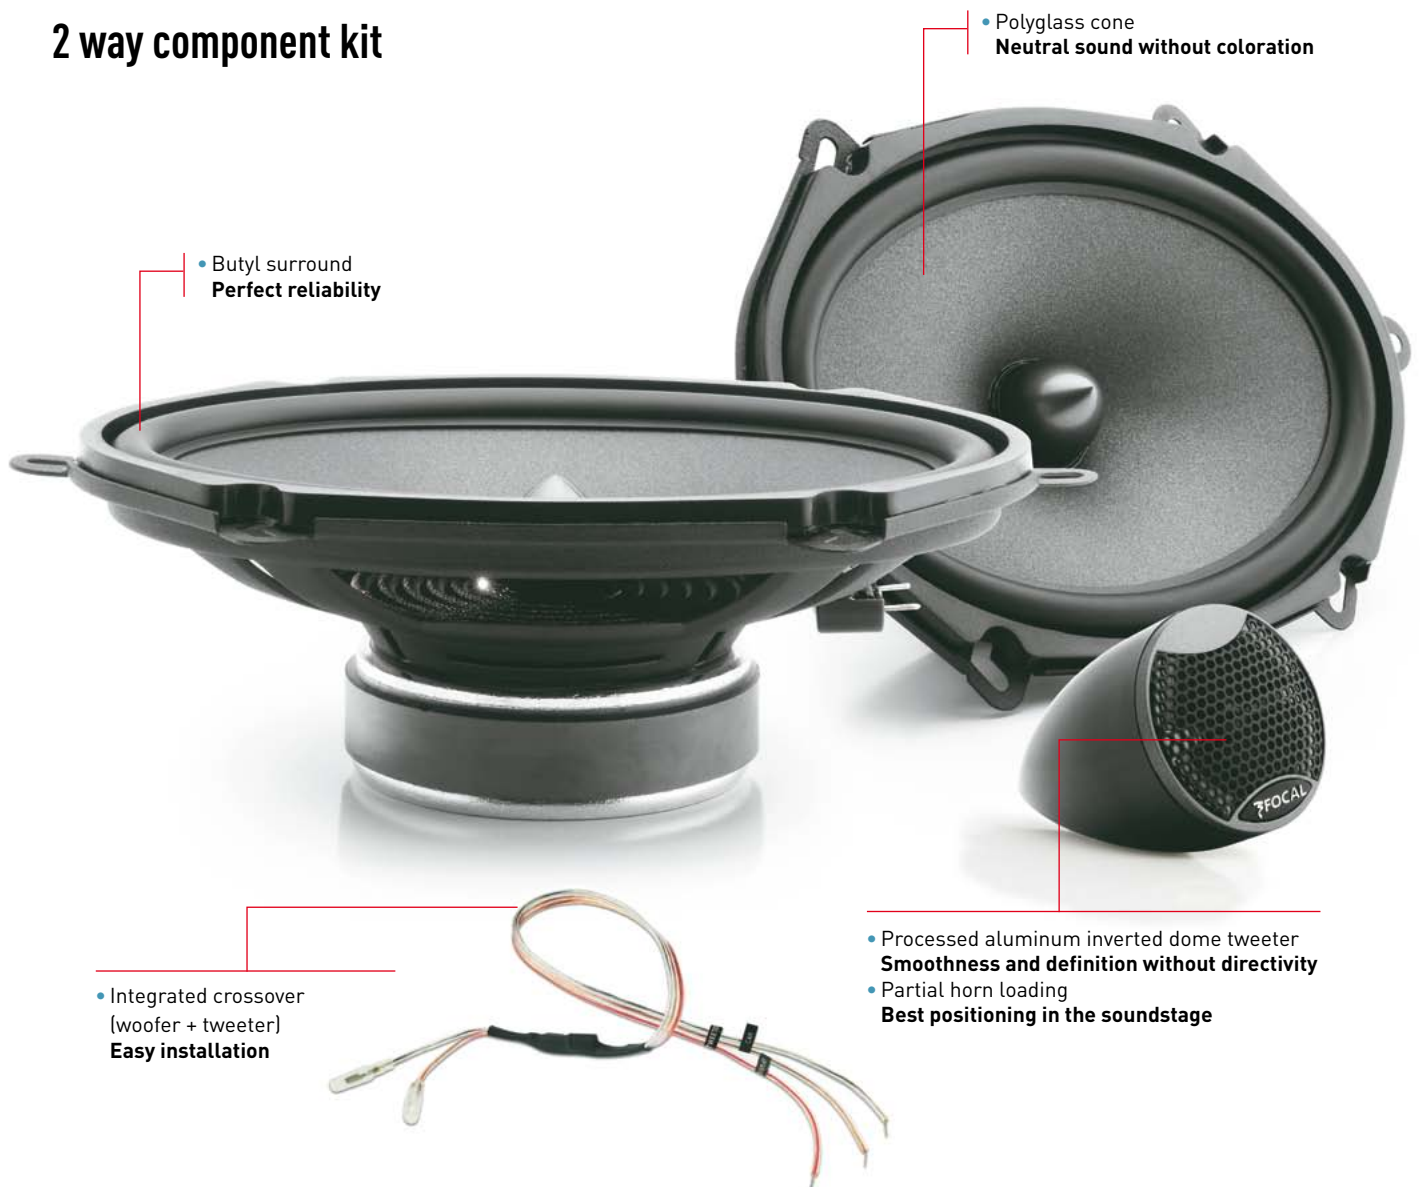

• Butyl surround
Perfect reliability

• Polyglass cone
Neutral sound without coloration

• Integrated crossover
(woofer + tweeter)
Easy installation

• Processed aluminum inverted dome tweeter
Smoothness and definition without directivity
• Partial horn loading
Best positioning in the soundstage

ADVANTAGES

- High sensitivity
- Shallow mounting depth (59.3mm)
- Partial horn loading tweeter
- Dynamics and neutrality
- 2 tweeter support types
- Tweeter compact size



Removable tweeter



Tilted mounting
Easy installation



Assembly option :
car and display

TECHNICAL CHARACTERISTICS

Woofer: 5x7" (130x180mm)
Voice-coil diameter: 1" (25mm)
Voice-coil height: 0^{7/16} (11mm)
Magnet: 3^{1/2} (85mm)

Processed Aluminum inverted dome tweeter
Integrated crossover: 6dB/oct (woofer + tweeter)
Max. power: 120W
Nom. power: 60W rms

Sensitivity (2,83 V/1 m) : 91.4dB
Frequency response: 65Hz – 20kHz
Accessories: Supplied without grille

 **Integration**
INSTANT GRATIFICATION

 **FOCAL**
THE SPIRIT OF SOUND