

K2 POWER ES 100 KE

Technical Sheet


Midrange 4"



SPECIFICATIONS

Nominal power	60W
Maximum power	120W
Sensitivity (2.83V/1m)	90dB
Cone	K2 Sandwich
Nom. impedance	4Ω
Surround	Butyl
DC resistance	2.8Ω
VC diameter	20mm 3/4"
Former	Kapton
Layers	2
Wire	CCAW
Net weight	215g 0.47lbs

FREQUENCY RESPONSE/IMPEDANCE

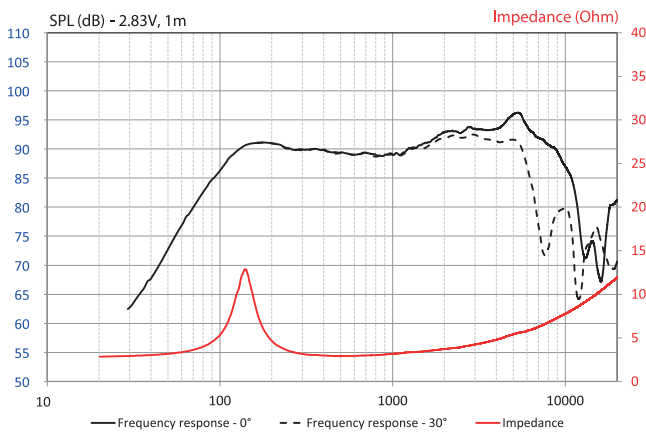

PARAMETERS

Rdc	2.8Ω
Fs	140Hz
Mms	4.7g
Cms	0.26mm/N
Vas	1l
Qts	0.9
Ges	1.1
Qms	4.2
Bxl	3.3 N/A
Sd	54cm ²
SPL	87.5dB
Xmax	2.3mm

MECHANICAL DRAWING (MM)

